


# EQUIPO TRIPROOF PREMIUM INGLYSF90L1200-40W

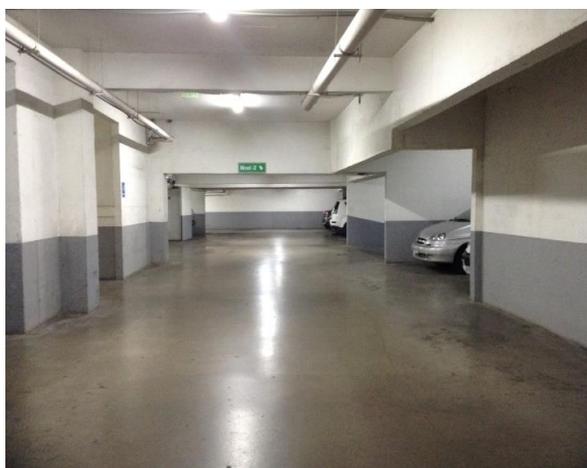

<b>DIMENSIONES cutout:</b>	1200 mm
<b>CONSUMO (W)</b>	40W
<b>VOLTAJE (V)</b>	AC100-277V
<b>TEMPERATURA (K°)</b>	WW:2700-3200 K NW: 4000-4500 K W: 6000-6500 K
<b>FLUJO DE LUZ (lm)</b>	4000 lm
<b>RENDIMIENTO DE COLOR</b>	>82ra
<b>TIPO DE LED</b>	Epistar Taiwan SMD 2835
<b>CANTIDAD DE LED</b>	▪ 36 pcs
<b>TEMPERATURA AMBIENTE</b>	-20~50°C
<b>ANGULO DE APERTURA</b>	120°
<b>INDICE DE PROTECCIÓN (IP)</b>	IP 67 / IK10
<b>INSTALACIÓN</b>	Colgante o Sobrepuesto
<b>GARANTIA</b>	3 años
<b>POWER DISMISS</b>	<5%
<b>AHORRO ENERGÍA</b>	90 %
<b>VIDA ÚTIL</b>	50.000 hrs.
<b>BASE</b>	-
<b>RECICLABLE</b>	SI
<b>DIMEABLE</b>	SI OPCIONAL
<b>RAYOS UV</b>	NO
<b>MATERIAL TOXICO</b>	NO

**Características especiales;**


- ✓ Retardante de fuego
- ✓ Hermetico
- ✓ Anti explosion
- ✓ Anti golpes, vandalismo
- ✓ Anti corrosión
- ✓ Anti reflectante

**Features**



**The actual test**

A long time watering test, no water inside the lamp body, continuous lighting.

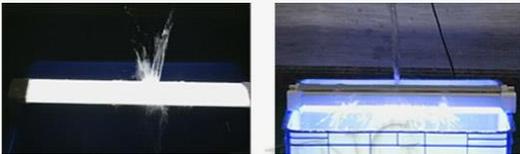

watering the front

watering the back


A long time burning test, pc cover melting, no combustion.





burning

after burning

After the stress test, the lamp is continuous lighting, and it can bear the weight of two adults.

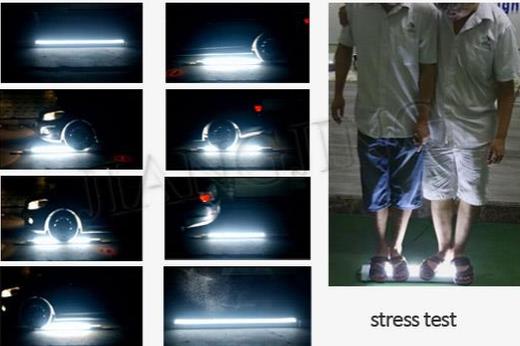

stress test

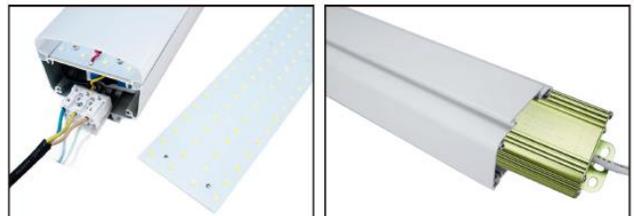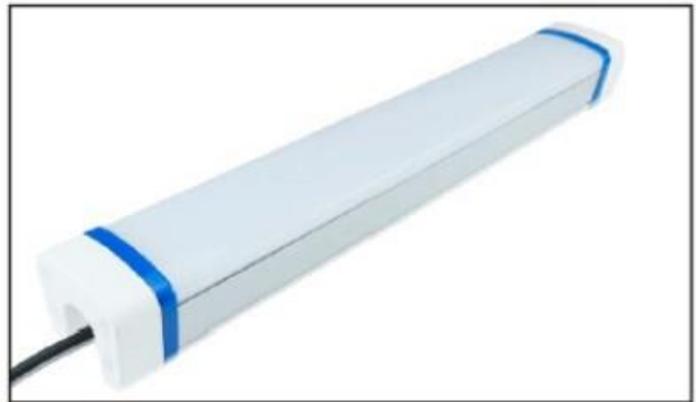

Product Details

## A diagram showing the lamp

