



Color Anchor Collection

Mannington
COMMERCIAL

Bringing spaces to life.

Color Anchor LVT brings spaces to life with 20 vivid, versatile shades. The collection can be used on its own or integrated effortlessly with other flooring types.

The variety of hues are available in two subtle patterns: Groove, a fabric-like crosshatch visual, and Stride, a finely dappled linear pattern. Color Anchor LVT is designed to coordinate across Mannington Commercial's carpet and hard surface offerings. With multiple plank and tile sizes to mix and match, there are endless patterning possibilities at your fingertips.





Cover and Above: Stride - (foreground) London Fog C139, Milk Thistle C121, Island Blue C129
Color Anchor Modular Carpet - (background) Ditto 12525, Thistle 24645, Island 35651





Groove - Peanut Shell C113, Milk Thistle C101, Rhubarb Pie C102, Poppy Red C103, Squash Blossom C112, Buzzy Yellow C104, Squawk Box C107



 Memorial
Information
Guest Services



Stride - Sterling Gray C140, London Fog C139, Cottontail C138



Success Is in Our Science



Introducing an advancement in our proven Quantum Guard technology: Quantum Guard Elite. This patent pending technology provides the ultimate solution for all aspects of LVT performance.

- Highest scratch resistance in the industry
- Engineered for best-in-class dimensional stability
- Superior impact resistance
- Cuts cleanly for highest quality installation
- Easy no-polish maintenance significantly reduces overall life cycle cost and total cost of ownership
- Advanced stain resistance

Outperforms in Scratch Resistance

Quantum Guard Elite


Leading Competitor

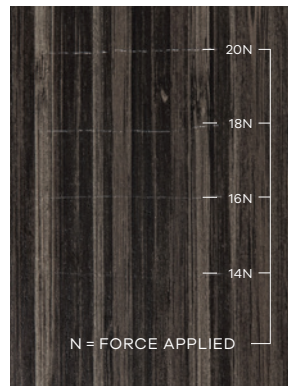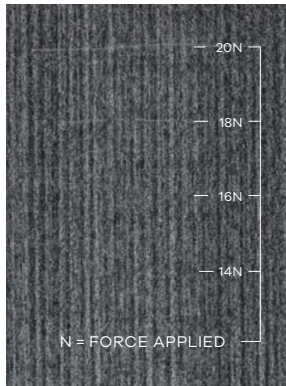

With a patent-pending two-part wear layer and aluminum oxide infused top coat, Quantum Guard Elite offers superior scratch resistance vs. the leading competitor.

Complete Multi-Layered Protection



Quantum Guard Elite combines a hard wear layer and a flexible wear layer for superior durability with the added protection of our proprietary aluminum oxide technology.

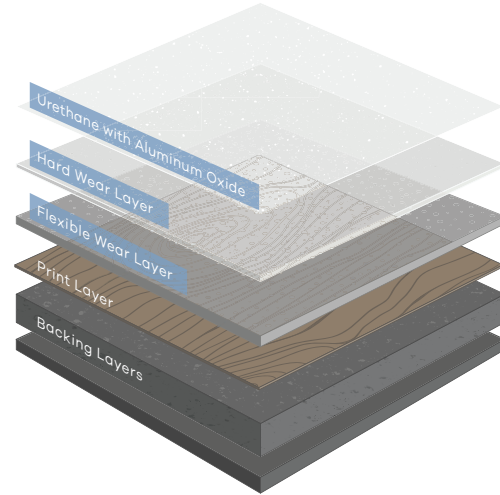

Best-in-Class Dimensional Stability

Quantum Guard Elite

Leading Competitor



LVT with Quantum Guard Elite is fully engineered to offer the perfect balance of hardness and flexibility, which helps prevent product failures in commercial environments. Products exposed to 80 ° C for six hours.

Warranted to Work

Products with Quantum Guard Elite feature our Limited Quantum Guard Elite Wear Warranty and Limited Commercial Warranty.

Color Anchor Collection

Style	Groove, Stride
Construction	Luxury Vinyl Tile Non-ortho Phthalate
Classification	ASTM F1700 Class III, Type B
Total Thickness	0.098" (2.5 mm)
Wear Layer Thickness	20 mil (0.51 mm)
Wear Layer	Quantum Guard Elite®
Edge Treatment	Micro-bevel
Sizes	6" x 36" (152 mm x 915 mm) 12" x 24" (305 mm x 610 mm) 18" x 18" (457 mm x 457 mm)
Colors	20 each style
Packaging	6" x 36" - 19 pcs, 28.5 ft ² (2.648 m ²), 21.23 lbs (9.63 kg) 12" x 24" - 18 pcs, 36 ft ² (3.345 m ²), 26.82 lbs (12.17 kg) 18" x 18" - 12 pcs, 27 ft ² (2.508 m ²), 20.12 lbs (9.126 kg) Packaging may differ for QuickStix®
Adhesive	Porous & Non-porous Substrates: V-95 Full Spread 2-part Epoxy V-88 Full Spread, Transitional Pressure Sensitive, High Moisture XpressStep for LVT & Sheet Vinyl Full Coverage Spray XpressStep Premium for LVT Full Coverage High Moisture Spray Porous Substrates Only: V-82 Full Spread Note: Must use V-95, XpressStep or XpressStep Premium under hospital beds and heavy rolling load areas. Use V-95 in Operating Rooms or where higher risk of topical moisture would be a concern.
QuickStix®	Available with QuickStix® pre-applied adhesive, reducing time and labor required to install the flooring. QuickStix® floors can be used immediately after installation, even in extreme moisture areas.
Installation Method	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.
Testing	
HUD/FHA	Passes
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/in ft.
Squareness (ASTM F540)	Passes - Max 0.010"
Static Load (ASTM F970 mod.)	Passes - 2,000 PSI; Residual Indent ≤ 0.005"
Residual Indentation (ASTM F1914)	Passes - < 8% Avg / 10% Single Value
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²
Smoke Density (ASTM E662)	Passes - ≤ 450
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber
Resistance to Light (ASTM F1515)	Passes
Chemical Resistance (ASTM F925)	Passes
Resistance to Heat (ASTM F1514)	Passes
Environmental Data	
Rapidly Renewable Content	Contains 2% rapidly renewable resource content
Indoor Air Quality	FloorScore Certified; CDPH v1.1-2010
Product Declarations	EPD, HPD
LEED Scoreboard	May contribute to LEED credits: LEED 2009: MRc5 Regional Materials; MRc6 Rapidly Renewable Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials
mindful MATERIALS Manufacturing	Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered
Warranty	
	Limited 15 Year Commercial Warranty Limited 15 Year Quantum Guard Elite® Wear Warranty