



---

Walkway® Collection  
Walkway® 20 Collection

**Mannington**  
COMMERCIAL



Cover: Wood - Timberwolf Elm WW117, W117, Abstract - Bryant WW130  
Above: Stone - Lugano WW128





Wood - Northern Silky Oak WW119, W119, **Abstract** - Morrell WW132

## Walkway Collection & Walkway 20 Collection



**Pacific Maple**

Walkway WW123  
Walkway 20 W123



**Northern Silky Oak**

Walkway WW119  
Walkway 20 W119



**Bolly Beech**

Walkway WW120  
Walkway 20 W120



**Silver Beech**

Walkway WW121  
Walkway 20 W121



**Tobacco Ipe**

Walkway WW122  
Walkway 20 W122



**Gunwood Walnut**

Walkway WW116  
Walkway 20 W116



**Timberwolf Elm**

Walkway WW117  
Walkway 20 W117



**Rum Cherry**

Walkway WW118  
Walkway 20 W118

**Walkway Collection**



**Rock Maple**

Walkway WW100



**Spalted Maple**

Walkway WW103



**Windsor Oak**

Walkway WW109



**Honey Oak**

Walkway WW102



**Classic Oak**

Walkway WW108




**Australian Acacia**

Walkway WW106



**American Cherry**

Walkway WW104

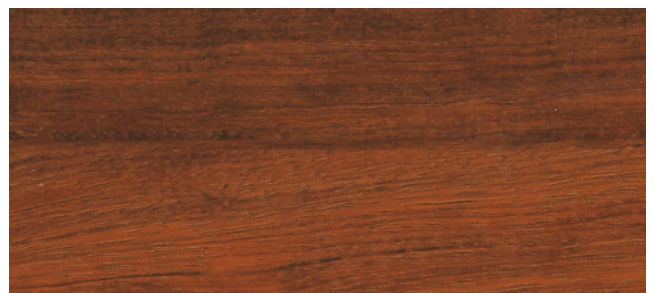

**Brazilian Cherry**

Walkway WW107

**Walkway Collection**



**Nirot**

Walkway WW126



**Emmet**

Walkway WW133



**Herald**

Walkway WW129



**Forsyth**

Walkway WW131



**Bryant**

Walkway WW130



**Morrell**


Walkway WW132

**Walkway Collection**



**Camel Back**

Walkway WW110

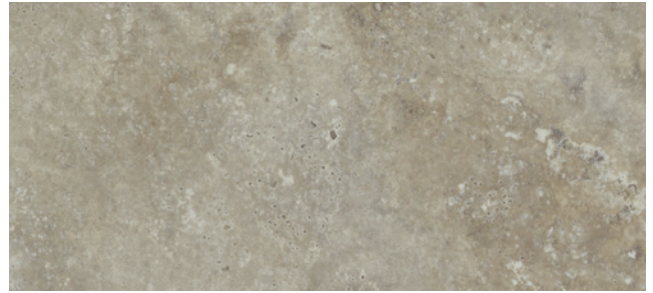

**Larino**

Walkway WW125



**Malaga**

Walkway WW124



**Lugano**

Walkway WW128



**Burlap**

Walkway WW111



**Barnau**

Walkway WW127



## Walkway Collection & Walkway 20 Collection Product Availability

Product Name	Walkway Color Code	Walkway 20 Color Code	Type	Squared Edges	Micro-beveled Edges	4" x 36" (102 x 915 mm)	6" x 36" (152 x 915 mm)	18" x 18" (457 x 457 mm)
<b>ABSTRACT</b>								
Bryant	WW130		Abstract	•				•
Emmet	WW133		Abstract	•				•
Forsyth	WW131		Abstract	•				•
Herald	WW129		Abstract	•				•
Morrell	WW132		Abstract	•				•
<b>STONE</b>								
Barnau	WW127		Stone	•				•
Burlap	WW111		Stone	•				•
Camel Back	WW110		Stone	•				•
Larino	WW125		Stone	•				•
Lugano	WW128		Stone	•				•
Malaga	WW124		Stone	•				•
Nirot	WW126		Stone	•				•
<b>WOOD</b>								
American Cherry	WW104		Wood	•		•		
Australian Acacia	WW106		Wood	•		•		
Bolly Beech	WW120		Wood	•			•	
Bolly Beech		W120	Wood		•		•	
Brazilian Cherry	WW107		Wood	•		•		
Classic Oak	WW108		Wood	•		•		
Gunwood Walnut	WW116		Wood	•			•	
Gunwood Walnut		W116	Wood		•		•	
Honey Oak	WW102		Wood	•		•		
Northern Silky Oak	WW119		Wood	•			•	
Northern Silky Oak		W119	Wood		•		•	
Pacific Maple	WW123		Wood	•			•	
Pacific Maple		W123	Wood	•	•		•	
Rock Maple	WW100		Wood			•		
Rum Cherry	WW118		Wood	•			•	
Rum Cherry		W118	Wood		•		•	
Silver Beech	WW121		Wood	•			•	
Silver Beech		W121	Wood		•		•	
Spalted Maple	WW103		Wood	•		•		
Timberwolf Elm	WW117		Wood	•			•	
Timberwolf Elm		W117	Wood		•		•	
Tobacco Ipe	WW122		Wood	•			•	
Tobacco Ipe		W122	Wood		•		•	
Windsor Oak	WW109		Wood	•		•		

**Walkway® 20 Collection**

Style	Wood
Construction	Luxury Vinyl Tile Non-ortho Phthalate
Classification	ASTM F1700 Class III, Type B
Total Thickness	0.098" (2.5 mm)
Wear Layer Thickness	20 mil (0.51 mm)
Wear Layer	Enhanced Urethane
Edge Treatment	Micro-bevel
Sizes	6" x 36" (152 x 915 mm)
Colors	8
Packaging	24 pcs, 36 ft <sup>2</sup> (3.345 m <sup>2</sup> ), 23.29 lbs. (10.56 kg)
Adhesive	<b>Porous and Non-porous Substrates:</b> <b>V-95</b> Full Spread, 2-part Epoxy <b>V-88</b> Full Spread, Transitional Pressure Sensitive, High Moisture <b>XpressStep</b> for LVT & Sheet Vinyl Full Coverage Spray <b>XpressStep Premium</b> for LVT Full Coverage High Moisture Spray <b>Porous Substrates Only:</b> <b>V-82</b> Full Spread  <b>Note:</b> Must use V-95, XpressStep or XpressStep Premium adhesive under hospital beds and heavy rolling load areas. Use V-95 where higher risk of topical moisture would be a concern.
Installation Method	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance.
<b>Testing</b>	
HUD/FHA	Passes
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/lin ft
Squareness (ASTM F540)	Passes - Max 0.010"
Static Load (ASTM F970 mod.)	Passes - 1,500 PSI; Residual Indent ≤ 0.005"
Residual Indentation (ASTM F1914)	Passes - < 8% Avg / 10% Single Value
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm <sup>2</sup>
Smoke Density (ASTM E662)	Passes - ≤ 450
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber
Resistance to Light (ASTM F1515)	Passes
Chemical Resistance (ASTM F925)	Passes
Resistance to Heat (ASTM F1514)	Passes
<b>Environmental Data</b>	
Indoor Air Quality	FloorScore Certified; CDPH v1.1-2010
Product Declarations	EPD, HPD
LEED Scoreboard	May contribute to LEED credits: LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials
mindful MATERIALS	Visit mM Origin website, <a href="http://mindfulmaterials.origin.build">mindfulmaterials.origin.build</a> , for current transparency information
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered
<b>Warranty</b>	
	Limited 10 Year Commercial Warranty

**Walkway® Collection**

<b>Style</b>	<b>Wood</b>	<b>Abstract &amp; Stone</b>
<b>Construction</b>	Luxury Vinyl Tile Non-ortho Phthalate	Luxury Vinyl Tile Non-ortho Phthalate
<b>Classification</b>	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B
<b>Total Thickness</b>	0.080" (2.0 mm)	0.080" (2.0 mm)
<b>Wear Layer Thickness</b>	12 mil (0.30 mm)	12 mil (0.30 mm)
<b>Wear Layer</b>	Enhanced Urethane	Enhanced Urethane
<b>Edge Treatment</b>	Square	Square
<b>Sizes</b>	4" x 36" (102 x 915 mm) 6" x 36" (152 x 915 mm) Sizes are style dependent; refer to Product Availability Chart	18" x 18" (457 x 457 mm)
<b>Colors</b>	16	12
<b>Packaging</b>	4" x 36" - 36 pcs, 36 ft <sup>2</sup> (3.345 m <sup>2</sup> ), 33.84 lbs (15.35 kg) 6" x 36" - 24 pcs, 36 ft <sup>2</sup> (3.345 m <sup>2</sup> ), 23.29 lbs. (10.56 kg)	16 pcs, 36 ft <sup>2</sup> (3.345 m <sup>2</sup> ), 23.29 lbs (10.56 kg)
<b>Adhesive</b>	<b>Porous &amp; Non-porous Substrates:</b> <b>V-95</b> Full Spread 2-part Epoxy <b>V-88</b> Full Spread, Transitional Pressure Sensitive, High Moisture <b>XpressStep</b> for LVT & Sheet Vinyl Full Coverage Spray <b>XpressStep Premium</b> for LVT Full Coverage High Moisture Spray <b>Porous Substrates Only:</b> <b>V-82</b> Full Spread <b>Note:</b> Must use V-95, XpressStep or XpressStep Premium adhesive under hospital beds and heavy rolling load areas. Use V-95 where higher risk of topical moisture would be a concern.	
<b>Installation Method</b>	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.	
<b>Testing</b>		
HUD/FHA	Passes	
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break	
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/lin ft	
Squareness (ASTM F540)	Passes - Max 0.010"	
Static Load (ASTM F970 mod.)	Passes - 1,000 PSI; Residual Indent ≤ 0.005"	
Residual Indentation (ASTM F1914)	Passes - < 8% Avg / 10% Single Value	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm <sup>2</sup>	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber	
Resistance to Light (ASTM F1515)	Passes	
Chemical Resistance (ASTM F925)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
<b>Environmental Data</b>		
Indoor Air Quality	FloorScore Certified; CDPH v1.1-2010	
Product Declarations	EPD	
LEED Scoreboard	May contribute to LEED credits: LEED 2009: MRc5 Regional Materials; IEQ4.1 Low Emitting Adhesives; IEQ4.3 Low Emitting Materials - Flooring LEED v4: Building Product Disclosure & Optimization - EPDs; IEQc2 - Low Emitting Materials Visit mM Origin website, mindfulmaterials.origin.build, for current transparency information Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered	
mindful MATERIALS Manufacturing		
<b>Warranty</b>		
Limited 10 Year Light Commercial Warranty		