
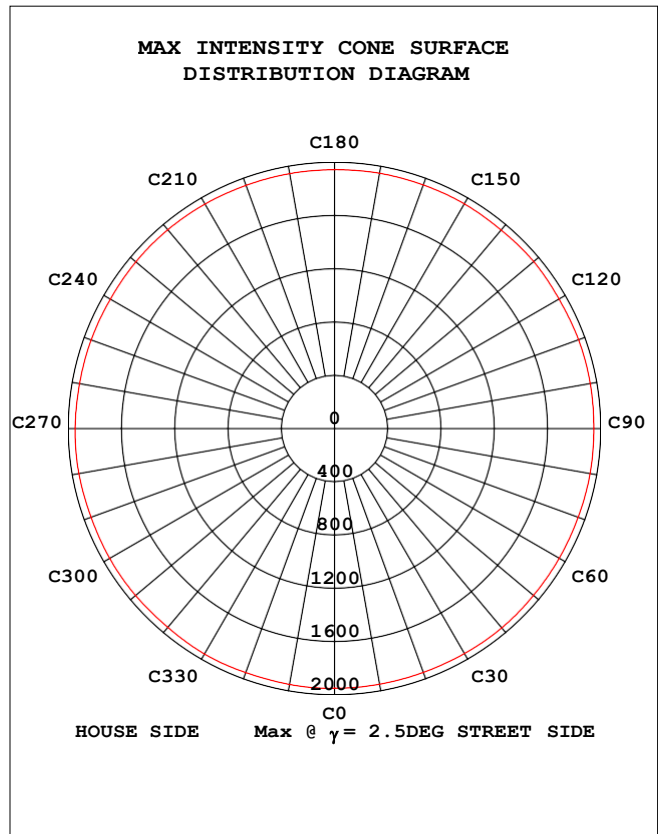


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A

DATA OF LAMP PHOTOMETRY		C DATA			
MODEL	DEC-PARQUE-26	I _{max} (cd)	1955	η street_up (%)	0.6
NOMINAL POWER (W)		LOR (%)	100.0	η street_down (%)	49.1
RATED VOLTAGE (V)		TOTAL FLUX (lm)	5870	η house_up (%)	0.7
NOMINAL FLUX (lm)	5870.17	MAXIMUM @ (C, γ)	330, 2.5	η house_down (%)	49.6
LAMPS INSIDE	1	η up (%)	1.3	76 FLASHAREA (m2)	0.05000
TEST VOLTAGE (V)		η down (%)	98.7	SLI	21.325

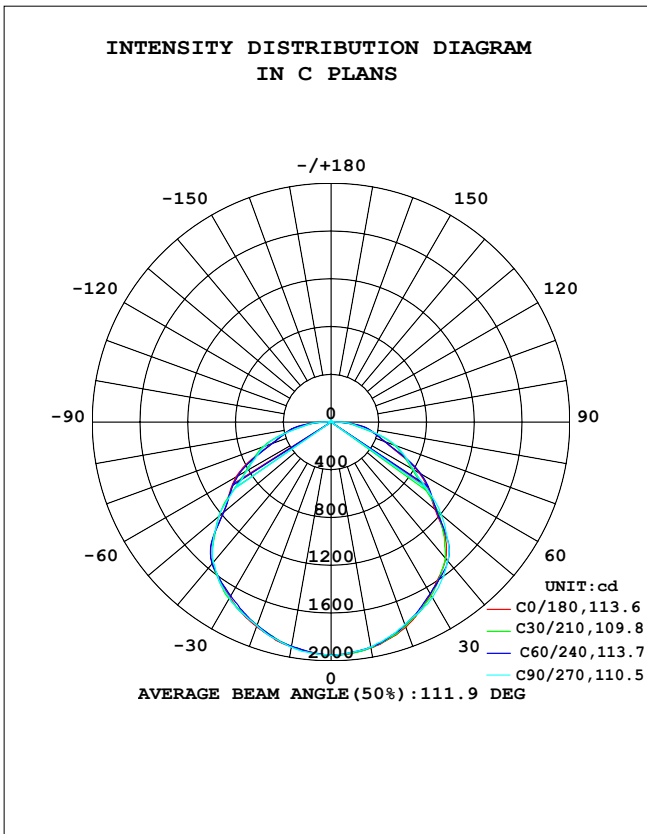


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.3952]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A

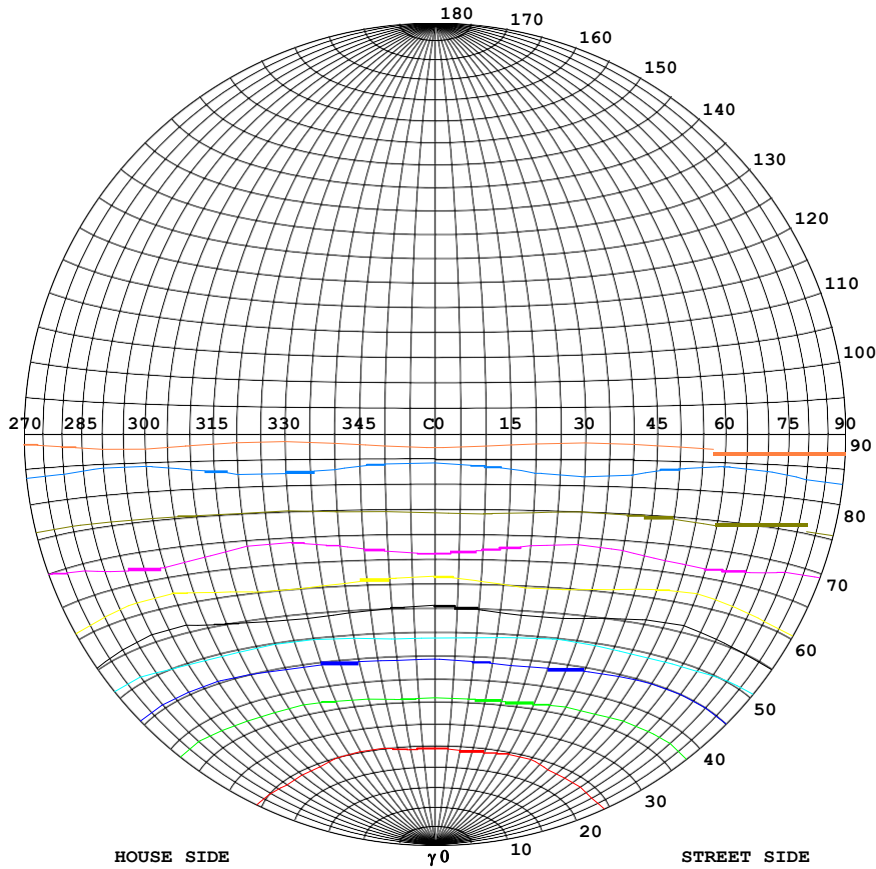

Classification:



IES:Type V - Very Short
 CIE:Narrow - Short
 IES:Cut-off
 CIE:Semi-cut-off
 Max.At80:57.41cd/klm
 Max.At90:13.17cd/klm
 Max.80-90:57.41cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
I _{max} =100%	1955
90%	1760
80%	1564
70%	1369
60%	1173
50%	978
40%	782
30%	587
20%	391
10%	196
5%	98

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

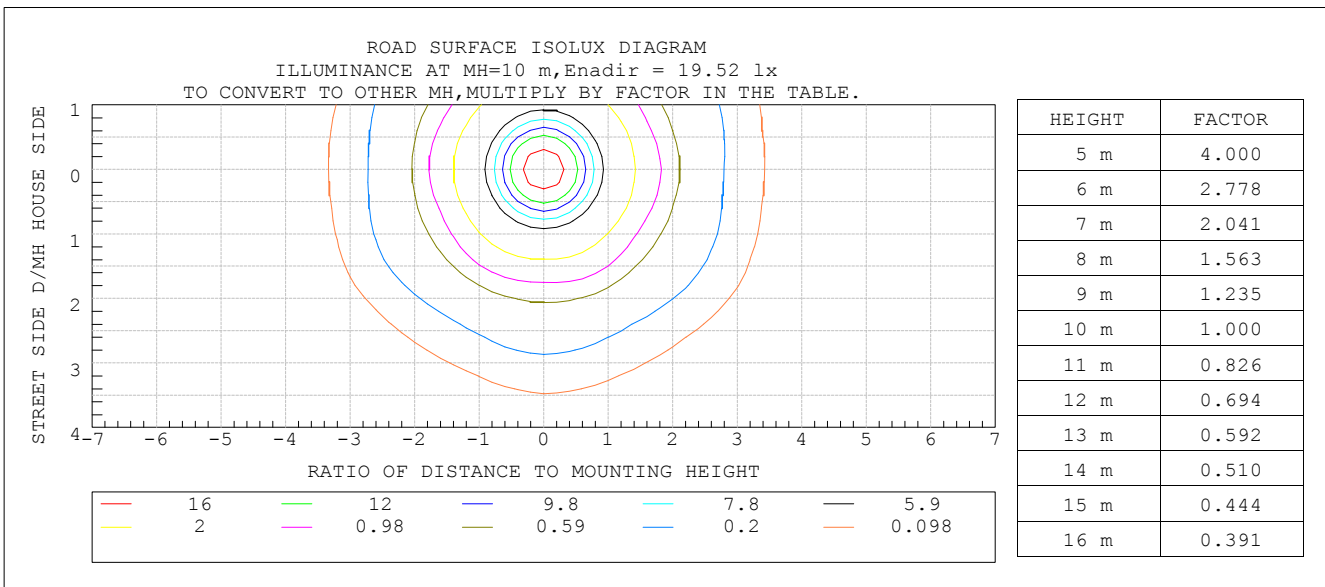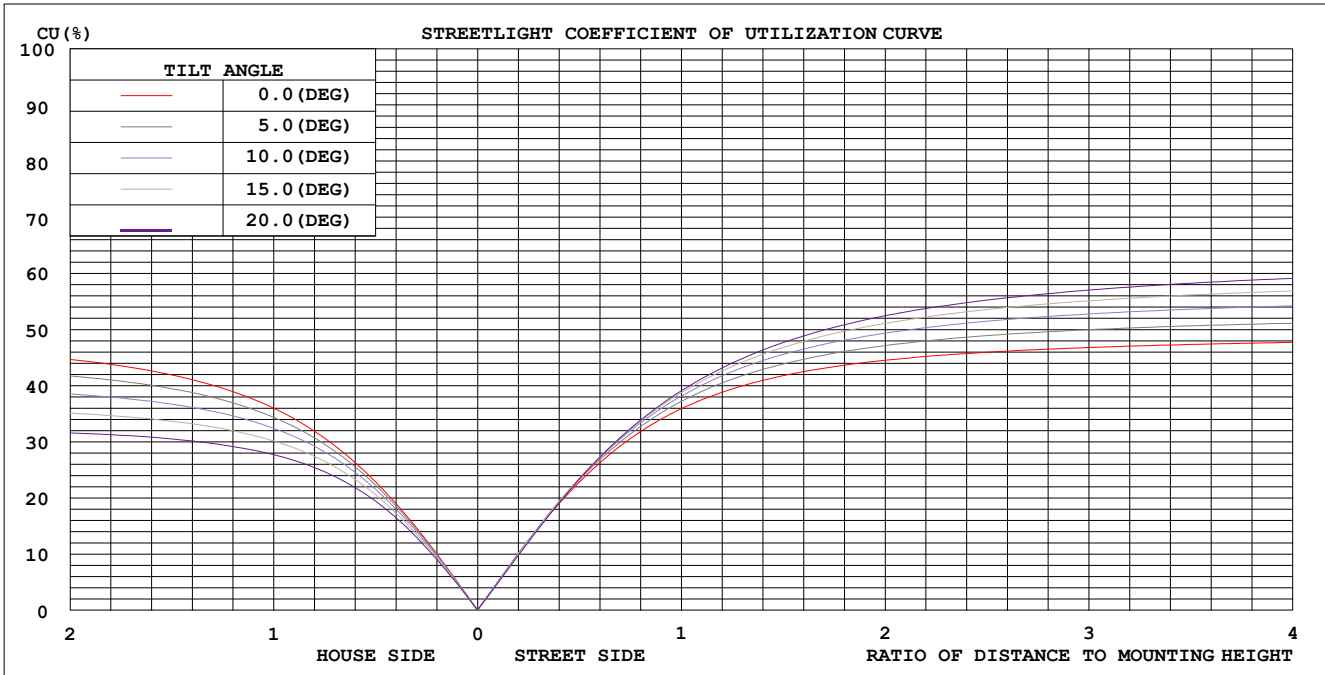

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
Humidity: 65.7%
Test Distance: 26.000m [K=1.3952]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1923	1919	1915	1917	1911	1908	1915	1924	0- 10	184.4	184.4	3.14,3.14
20	1829	1818	1805	1827	1823	1816	1815	1823	10- 20	529.0	713.4	12.2,12.2
30	1666	1669	1699	1696	1694	1689	1702	1683	20- 30	810.5	1524	26,26
40	1495	1506	1521	1542	1549	1543	1534	1511	30- 40	1009	2533	43.1,43.1
50	1137	1157	1204	1208	1179	1203	1226	1168	40- 50	1058	3591	61.2,61.2
60	852.1	830.5	801.6	842.8	917.2	873.6	809.9	808.2	50- 60	898.8	4490	76.5,76.5
70	476.1	518.1	578.2	560.7	529.5	558.9	590.1	544.5	60- 70	682.2	5172	88.1,88.1
80	307.3	273.9	246.4	302.5	337.0	319.2	267.7	273.5	70- 80	436.1	5608	95.5,95.5
90	55.18	59.99	66.18	56.36	63.57	68.81	69.25	67.67	80- 90	187.3	5796	98.7,98.7
100	16.89	15.51	15.83	17.00	18.62	18.21	15.27	16.12	90-100	34.41	5830	99.3,99.3
110	5.063	4.971	4.360	5.022	5.048	4.225	5.030	5.829	100-110	9.891	5840	99.5,99.5
120	4.590	4.635	4.651	3.910	5.445	4.785	7.161	7.706	110-120	4.905	5845	99.6,99.6
130	5.877	5.192	6.496	4.759	6.473	5.822	7.973	7.563	120-130	5.220	5850	99.7,99.7
140	7.069	6.371	7.678	5.904	6.699	6.638	9.158	7.636	130-140	5.176	5855	99.7,99.7
150	8.771	7.935	10.32	8.706	8.335	9.835	11.83	8.607	140-150	5.158	5860	99.8,99.8
160	9.523	10.87	12.25	10.48	9.523	11.32	13.36	12.14	150-160	4.787	5865	99.9,99.9
170	13.17	14.24	14.91	14.13	13.54	13.44	14.87	15.76	160-170	3.425	5869	100,100
180	18.25	18.10	18.83	19.26	18.15	18.80	18.75	17.72	170-180	1.568	5870	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A

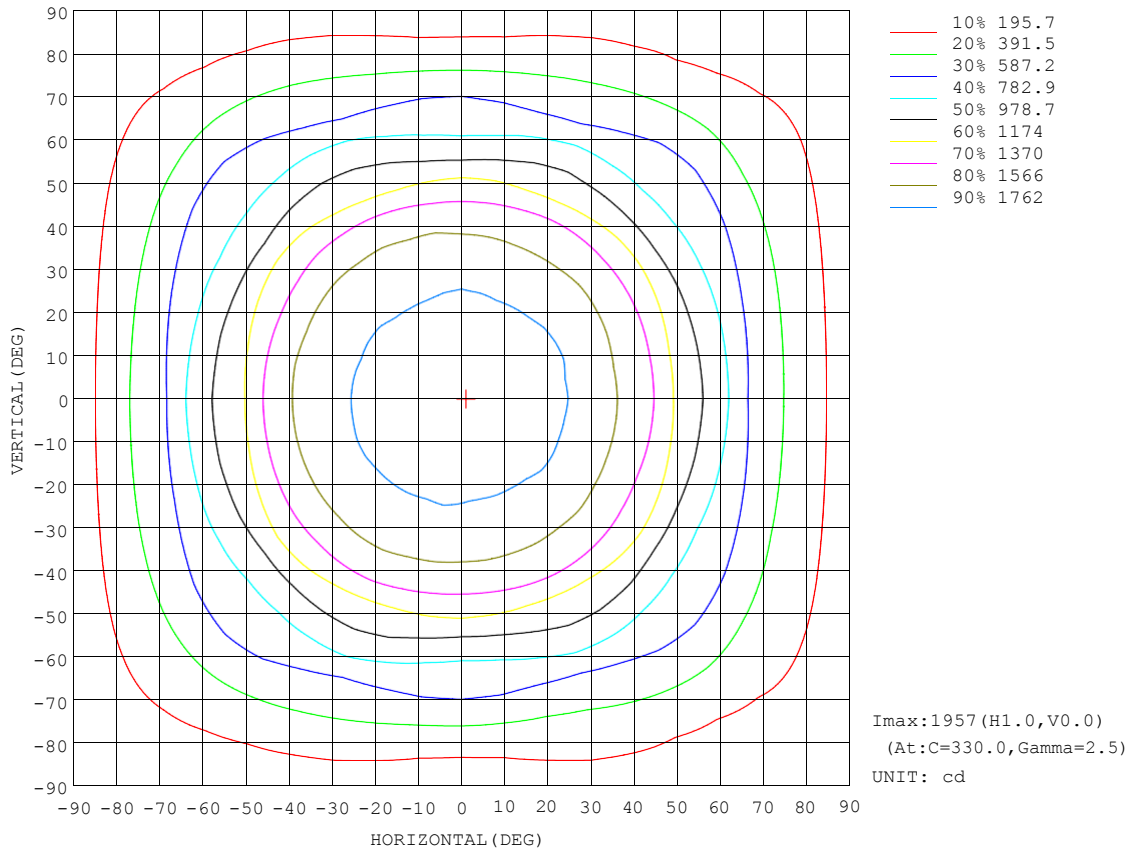

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

Planar Illuminance Curve

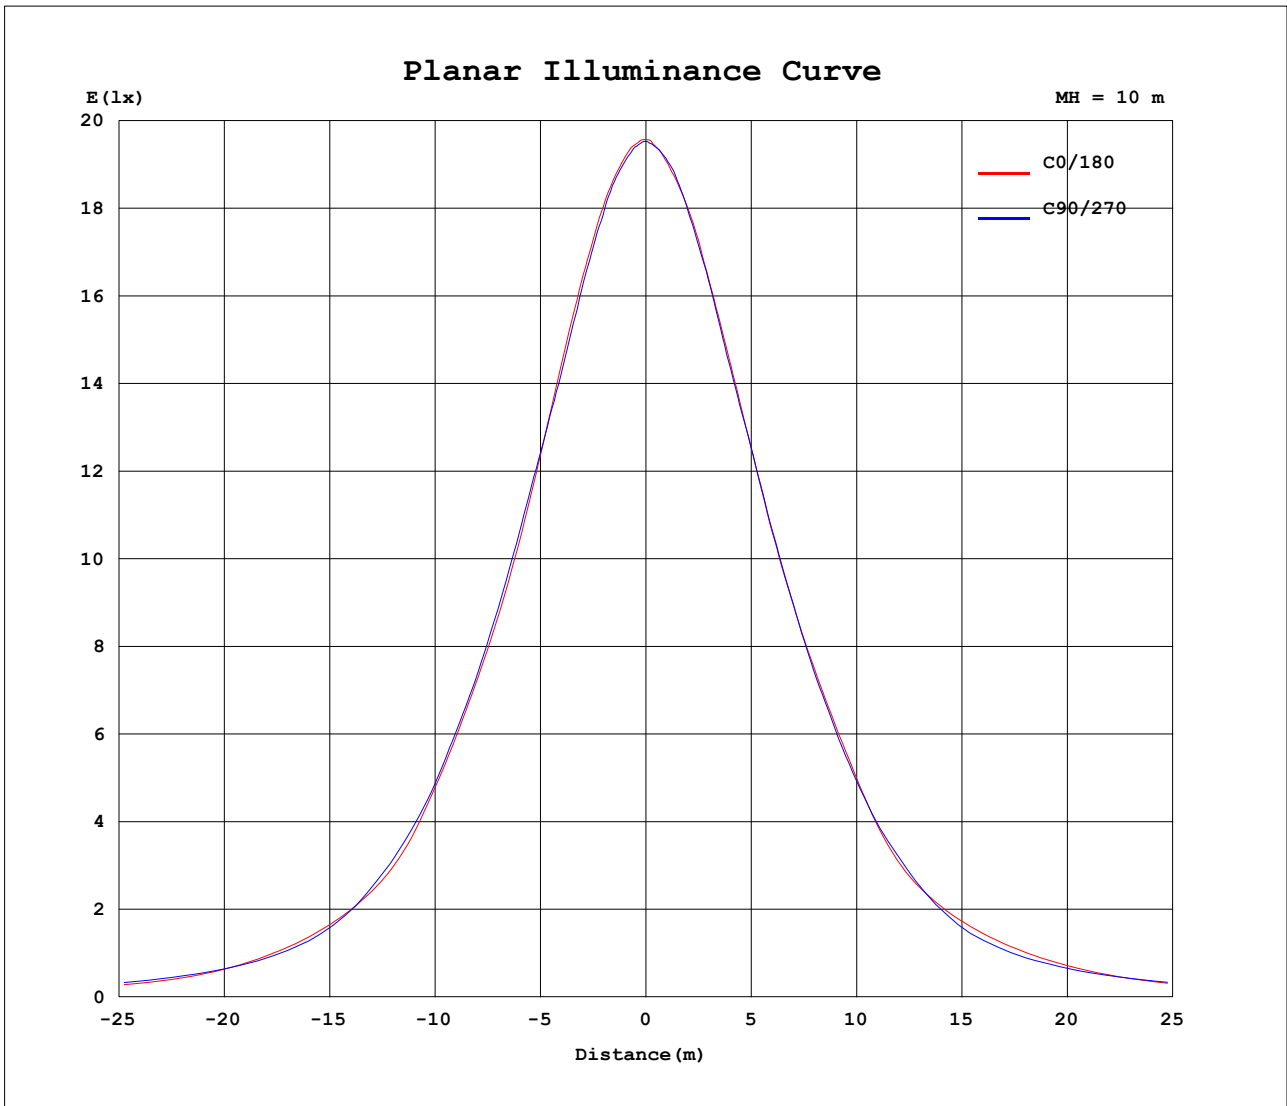


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.362
Humidity: 65.7%
Test Distance: 26.000m [K=1.3952]
Remarks:

LCS REPORT

Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

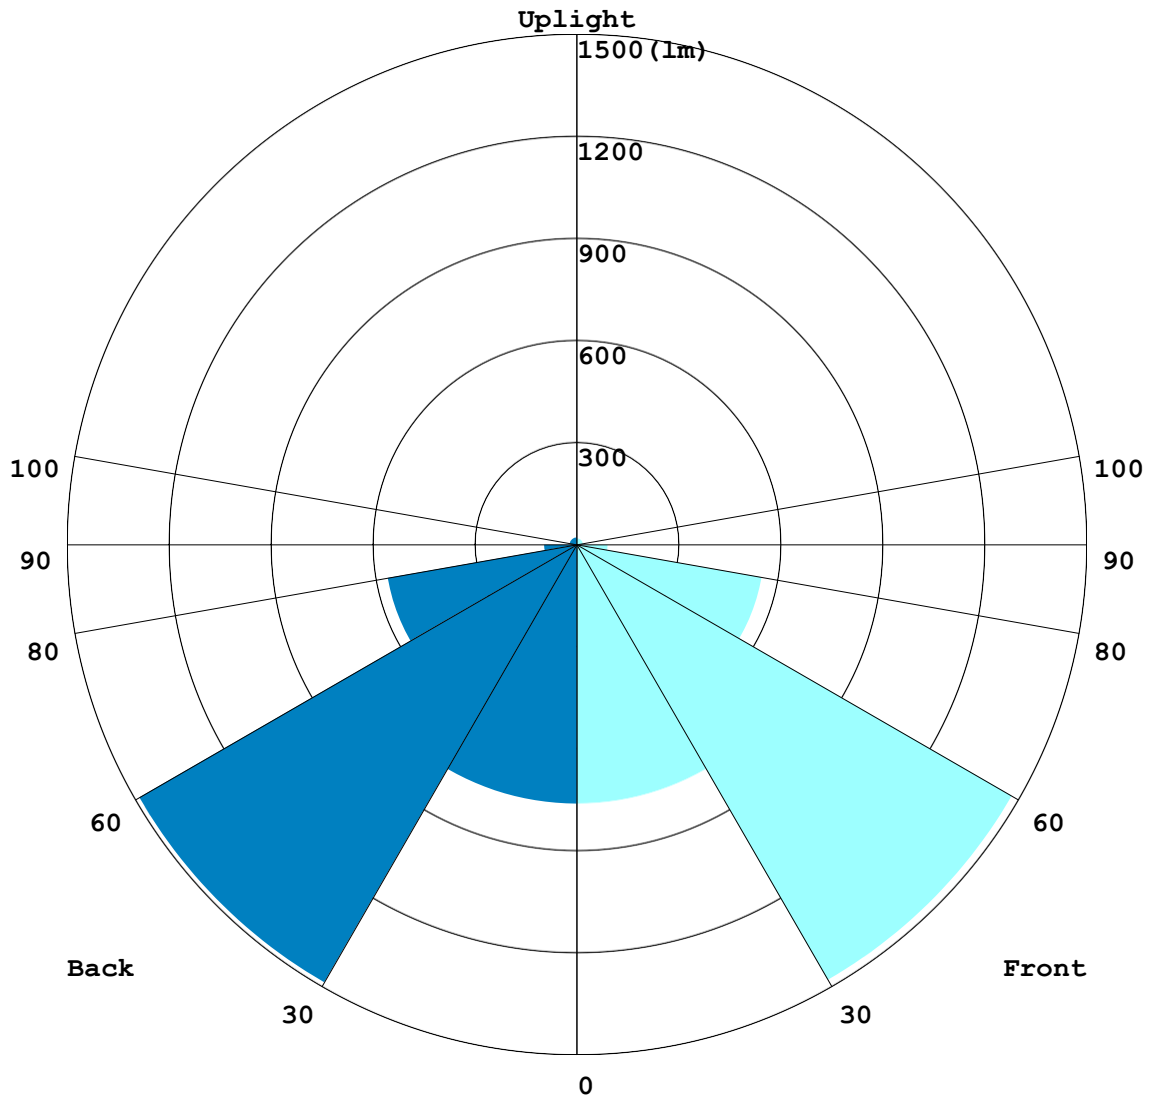

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

BUG REPORT

Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	761.87	13.0
FM - Front-Medium(30-60)	1479	25.2
FH - Front-High(60-80)	552.97	9.4
FVH - Front-Very High(80-90)	91.072	1.6
Total Forward Light	2920	49.7

BL - Back-Low(0-30)	762.11	13.0
BM - Back-Medium(30-60)	1487.1	25.3
BH - Back-High(60-80)	565.35	9.6
BVH - Back-Very High(80-90)	96.204	1.6
Total Back Light	2950.2	50.3

UL - Uplight-Low(90-100)	34.414	0.6
UH - Uplight-High(100-180)	40.13	0.7
Total Up Light	74.543	1.3

BUG(Back,Up,Glare) Rating	B2-U2-G1
----------------------------------	-----------------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2910.7	39.475	2950.2
Street Side	2884.9	35.068	2920


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A

ROAD SURFACE ISOCANDELA DIAGRAM

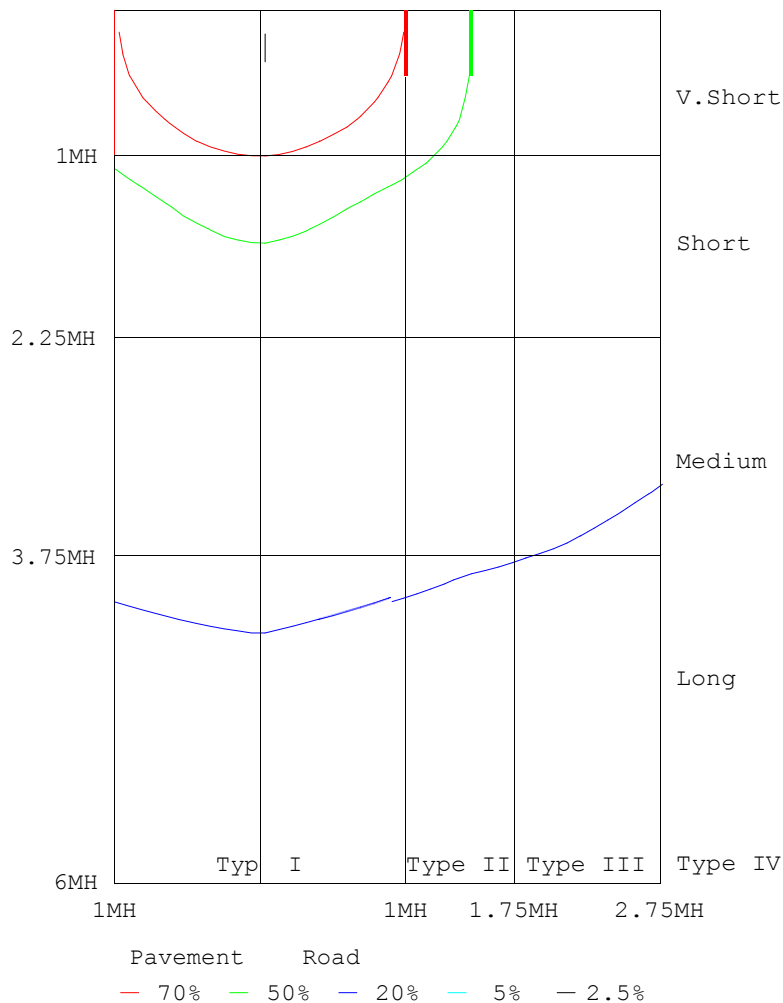

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953
5	1946	1944	1944	1942	1947	1941	1936	1940	1938	1939	1945	1937	1940	1940	1939	1943	1934	1939	1934
10	1923	1919	1919	1919	1918	1920	1913	1910	1910	1915	1912	1915	1923	1920	1913	1917	1912	1916	1911
15	1881	1878	1874	1874	1882	1872	1868	1869	1862	1864	1871	1871	1881	1884	1876	1876	1876	1881	1874
20	1829	1821	1820	1818	1821	1814	1808	1813	1804	1805	1814	1815	1827	1828	1827	1831	1832	1836	1823
25	1753	1746	1749	1754	1753	1741	1738	1742	1744	1750	1759	1755	1761	1765	1767	1772	1772	1774	1766
30	1666	1664	1670	1679	1671	1666	1661	1666	1682	1699	1687	1689	1690	1696	1695	1711	1704	1705	1694
35	1579	1578	1582	1586	1593	1590	1592	1602	1611	1615	1620	1616	1621	1623	1630	1632	1632	1634	1624
40	1495	1483	1480	1490	1500	1512	1520	1523	1523	1521	1528	1538	1547	1542	1541	1542	1542	1551	1549
45	1351	1339	1325	1334	1349	1361	1374	1377	1376	1378	1384	1398	1414	1408	1396	1404	1401	1407	1410
50	1137	1141	1157	1174	1164	1149	1152	1163	1189	1204	1198	1187	1186	1196	1221	1229	1206	1184	1179
55	999	979	948	941	986	1006	1015	997	985	983	1010	1030	1039	1021	1004	999	1022	1036	1040
60	852	811	778	782	807	854	869	839	806	802	827	880	900	866	820	810	847	896	917
65	636	651	663	667	671	667	661	667	676	685	696	696	699	694	701	702	710	712	729
70	476	494	543	562	538	498	481	499	556	578	567	531	508	538	584	599	584	538	530
75	384	380	384	402	393	387	381	384	400	423	416	411	409	409	431	450	431	421	421
80	307	289	248	228	258	290	307	299	272	246	272	310	328	319	286	264	292	324	337
85	176	164	156	157	153	167	180	168	162	167	165	173	178	165	161	163	161	169	188
90	55.2	56.8	63.2	67.1	64.4	55.6	52.2	53.1	61.4	66.2	64.6	58.3	55.2	54.1	58.7	63.4	61.4	58.4	63.6
95	28.3	25.1	23.8	23.9	24.4	27.6	28.3	25.9	25.1	25.4	26.2	29.1	29.9	27.8	27.1	28.1	29.1	30.5	32.5
100	16.9	16.1	15.1	13.8	14.6	16.4	16.4	16.5	16.0	15.8	16.0	18.0	17.5	17.0	17.1	16.8	17.0	18.0	18.6
105	9.01	9.13	7.21	7.66	7.11	8.14	9.32	9.50	7.45	7.40	7.99	10.8	9.18	6.97	7.00	8.43	8.64	10.2	9.89
110	5.06	5.02	5.88	6.40	5.33	4.61	3.72	3.47	3.54	4.36	4.06	3.42	3.64	4.73	5.31	6.43	6.42	5.41	5.05
115	4.09	4.06	4.56	5.30	5.10	4.17	3.56	3.40	3.61	4.36	3.91	3.41	3.27	3.48	4.34	5.46	4.86	4.37	4.61
120	4.59	4.13	4.56	5.74	5.10	4.17	3.42	3.40	3.68	4.65	3.91	3.27	3.20	3.47	4.34	5.39	4.86	4.58	5.44
125	5.50	5.31	5.95	6.18	5.32	4.23	3.72	3.99	4.05	4.86	3.99	3.56	3.64	3.62	4.71	5.39	5.89	5.26	6.03
130	5.88	5.84	6.03	6.11	5.55	4.84	4.39	4.29	5.23	6.50	5.91	4.89	4.68	4.58	4.93	5.46	6.04	5.92	6.47
135	6.24	5.84	6.10	6.33	5.55	5.57	5.66	6.21	5.82	7.60	6.27	5.85	4.98	5.10	4.93	5.46	6.04	6.08	6.62
140	7.07	7.23	7.13	6.92	5.92	6.82	6.25	7.68	7.22	7.68	7.00	6.98	7.13	5.91	5.89	5.97	6.04	6.81	6.70
145	7.07	7.31	7.20	7.28	6.66	7.51	8.26	8.50	8.40	8.71	8.12	8.90	8.98	6.94	6.78	7.16	7.15	8.66	8.19
150	8.77	8.93	8.52	9.26	7.47	8.40	9.52	9.75	9.43	10.3	10.5	10.5	9.58	9.46	7.95	8.19	8.62	9.40	8.34
155	9.52	9.82	8.97	8.83	9.68	10.6	10.7	10.9	10.6	12.0	12.5	10.8	10.8	9.54	9.35	9.79	10.4	10.2	8.12
160	9.52	9.89	10.1	10.5	10.7	11.0	10.8	11.1	10.6	12.3	13.1	11.9	10.8	10.6	10.3	10.0	10.3	10.6	9.52
165	11.5	11.6	11.0	10.8	10.9	11.1	13.1	12.8	11.9	13.2	13.0	12.9	12.2	11.4	11.1	10.3	10.6	10.7	11.0
170	13.2	14.3	13.4	14.0	14.1	14.4	14.2	14.4	14.1	14.9	15.3	15.7	16.4	14.7	13.6	13.3	12.7	13.1	13.5
175	16.7	17.2	16.4	15.8	15.9	16.5	17.0	17.8	17.1	18.0	18.8	18.1	18.4	17.6	16.6	18.6	17.6	17.7	17.2
180	18.3	18.9	19.4	19.7	18.6	17.6	17.4	17.8	18.9	18.8	18.5	17.2	17.9	18.5	20.0	19.5	18.0	17.8	18.2

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:0.00V I:0.00A P:0.00W PF:1.000 Freq:0Hz Lamp Flux:5870.17x1 lm		
NAME: DEC-PARQUE-26	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: S.S Co.Ltd / DecoSolar	SUR.:	Shielding Angle:N/A

Table--2

UNIT: cd

C (DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953	1953		
5	1931	1932	1938	1938	1936	1937	1940	1934	1941	1943	1940	1943	1946	1948	1953	1946	1947		
10	1907	1906	1908	1908	1908	1907	1907	1913	1915	1918	1915	1922	1926	1923	1922	1923	1921		
15	1867	1864	1863	1864	1862	1866	1871	1874	1871	1868	1867	1872	1878	1877	1882	1878	1878		
20	1823	1818	1809	1818	1815	1812	1819	1814	1815	1815	1816	1818	1824	1822	1828	1829	1829		
25	1765	1761	1762	1762	1747	1749	1751	1761	1765	1757	1749	1752	1754	1762	1767	1766	1751		
30	1695	1705	1708	1699	1678	1681	1683	1698	1702	1687	1670	1670	1680	1687	1694	1685	1667		
35	1629	1634	1633	1632	1617	1617	1626	1627	1630	1619	1598	1595	1599	1605	1597	1593	1581		
40	1548	1534	1539	1543	1543	1550	1543	1543	1534	1527	1524	1518	1515	1506	1504	1497	1488		
45	1400	1386	1386	1401	1403	1413	1405	1397	1394	1392	1391	1392	1376	1361	1359	1353	1349		
50	1195	1214	1224	1218	1188	1174	1179	1205	1226	1210	1176	1161	1162	1173	1174	1154	1136		
55	1032	1022	1005	1028	1034	1029	1015	998	994	1013	1016	1013	989	955	944	969	987		
60	884	836	824	854	893	900	866	819	810	821	864	869	825	791	790	805	837		
65	719	716	716	720	710	708	703	701	695	692	678	663	673	679	683	674	657		
70	565	599	606	580	538	522	548	583	590	556	510	497	522	567	573	533	487		
75	422	441	453	432	421	413	416	432	436	412	408	400	399	404	409	391	389		
80	311	269	268	307	331	335	315	274	268	293	321	323	298	249	240	276	304		
85	177	171	170	173	190	196	183	176	176	173	183	180	165	162	163	160	172		
90	68.5	74.9	77.3	72.9	64.7	62.7	65.7	69.6	69.2	62.0	54.7	57.2	64.5	70.8	73.8	69.1	60.8		
95	30.8	29.3	30.6	31.8	32.2	32.4	28.2	26.1	26.0	26.3	29.0	30.3	28.8	27.3	28.6	28.4	29.1		
100	17.8	16.8	17.4	17.7	18.7	18.6	17.7	16.1	15.3	15.5	17.5	17.3	16.2	16.0	15.9	15.7	16.9		
105	10.7	8.00	8.24	7.50	7.93	10.6	10.8	7.29	6.86	7.38	10.1	9.23	7.75	7.27	7.52	7.51	9.31		
110	6.56	6.84	6.99	4.66	3.79	3.87	5.33	4.72	5.03	3.25	3.64	4.68	5.77	5.89	6.49	4.64	4.59		
115	6.35	7.21	7.36	4.59	3.65	4.47	6.29	6.41	6.57	4.21	3.79	5.05	6.29	6.19	6.64	4.57	4.44		
120	7.31	9.12	9.05	5.40	4.17	4.85	6.44	7.00	7.16	4.66	4.38	5.28	7.02	8.39	8.19	6.04	5.78		
125	8.20	9.56	9.64	5.62	4.91	5.43	7.32	7.50	7.75	5.03	4.68	5.50	7.25	7.88	8.63	7.37	6.59		
130	8.12	8.74	8.90	5.99	5.65	6.32	7.84	7.29	7.97	5.98	5.27	6.02	7.25	7.88	8.63	7.30	6.59		
135	8.13	8.16	8.98	7.11	5.95	6.47	8.74	7.44	8.42	6.50	5.95	6.62	7.25	7.88	8.63	7.44	6.52		
140	8.35	8.31	9.13	7.25	6.03	7.74	9.47	9.36	9.16	7.16	8.09	6.98	7.25	8.03	8.63	7.52	6.22		
145	9.38	9.48	8.83	7.18	7.59	9.45	10.4	10.1	9.82	8.13	8.09	7.51	8.06	8.03	9.15	7.59	6.59		
150	9.38	9.63	8.98	9.33	10.3	10.9	11.6	12.3	11.8	10.3	9.65	10.6	8.52	8.69	9.96	8.33	8.00		
155	9.54	11.2	10.7	10.6	10.5	11.2	12.3	14.0	13.4	10.6	10.3	11.4	12.1	10.3	10.1	8.33	8.22		
160	9.75	11.4	10.2	11.5	11.1	10.6	12.7	13.0	13.4	11.2	11.1	11.4	12.5	11.8	10.8	10.4	9.94		
165	10.9	12.5	11.4	12.1	11.6	11.2	13.6	14.4	13.5	14.1	12.0	13.0	14.2	12.0	10.9	12.2	11.4		
170	13.3	14.9	13.8	13.3	13.6	15.8	17.0	17.2	14.9	15.4	14.2	14.3	15.7	15.8	14.3	14.9	14.0		
175	17.0	18.8	18.8	18.4	16.7	16.7	17.4	18.5	18.8	17.6	16.2	16.2	16.8	17.2	17.4	17.3	16.2		
180	17.7	18.6	19.0	19.4	18.2	17.6	17.3	17.8	18.7	18.8	18.6	16.9	17.3	18.1	19.6	19.5	18.1		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-08-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.362
 Humidity:65.7%
 Test Distance:26.000m [K=1.3952]
 Remarks: